


4" Solid Walls

PRODUCT CUT SHEET



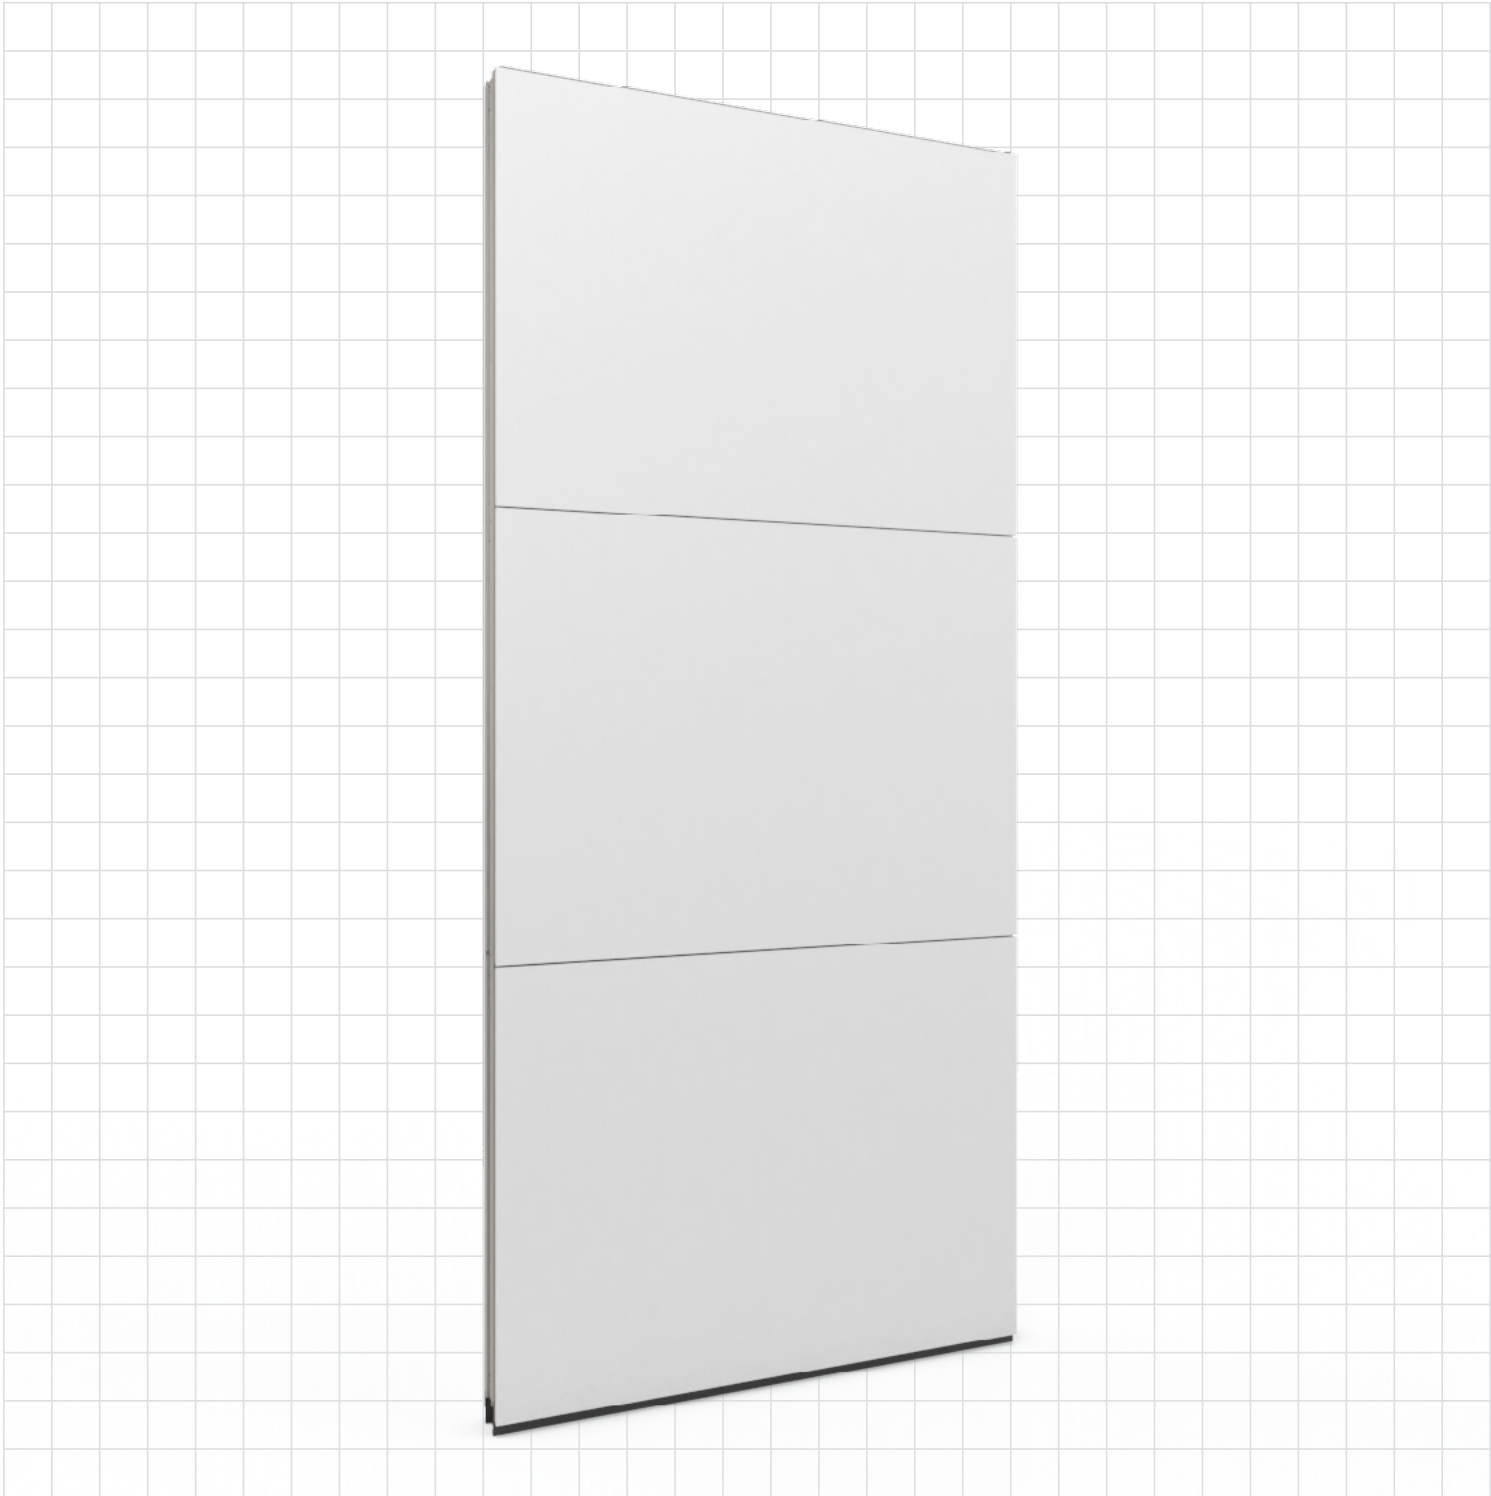

DIRTT EXPERIENCE CENTER
Dallas, TX

DIRTT's most popular solid wall offers extensive options. No matter what finish, color, or configuration you specify, DIRTT wall systems can support your design with the performance and long-term durability you need. Use the space inside the wall cavity to add electrical and network functionality. Take the system further by integrating technology, graphics, writable surfaces, casework, and more. Quick, clean installs accelerate your timelines and with easy-to-remove panels, future maintenance and reconfiguration is just as fast.



SYSTEM FEATURES

01	Both sides of the wall behave independently, allowing multiple panel configurations and finish options
02	Wall assemblies tip into place for quick installation
03	Frame attaches directly to ceiling, soffit, bulkhead, or structure and can be embedded in DIRT™ timber or within a recessed channel
04	Factory-installed recycled denim insulation provides improved acoustic performance
05	Wall panels are easily removable for reducing the time and cost of maintenance
06	Precision manufactured for base building accommodation
07	Modular design supports quick installation and easy reconfiguration
08	Frame-to-frame inline connections offer nondestructive adaptability
09	Leverage space in the wall cavity to integrate and protect technology
	Sound transmission class (STC) rating: 38 – 51
	SCS Indoor Advantage Gold certified


02



03



04/05




07/08



SYSTEM OPTIONS

10	Support your brand with customized finishes and graphics
11	Compatible with the full suite of DIRT™ Door modules
12	Seismic compatible
13	Limit transfer of smoke with our non-rated, smoke partition

10



11



12



13



4" Solid Walls

SIZE	
Standard wall thickness (with panels)	4" (102 mm)
Wall module width	6" (152 mm) – 48" (1.22 m)
Wall module height maximum	12' (3.66 m)*
Factory-installed insulation thickness	1" (25 mm)
Wall cavity depth	3" (76 mm)
*Frame assemblies that exceed module maximums must be validated by DIRT T to confirm they meet building code.	
TOLERANCES	
Wall height adjustability	- 3/8" (10 mm) + 2 5/8" (67 mm)
DESIGN CONFIGURATIONS	
Wall Module Configurations	Wall Connections
Full-height, free-standing, or low wall	Frame connects to acoustic ceiling tile (ACT) grid, bulkhead, drywall soffit, metal stud kickers, or cornice rail
Choose wall panel reveals of 3/16" (4 mm) or 3/8" (9 mm)	Base track secures to the base building with carpet grippers, double-sided tape, or seismic anchoring
Option to stack in frame module with DIRT T Classic or Double Pane Glass Walls	Wall modules connect with frame-to-frame inline connections
Finish the wall with optional end caps	Wall modules connect to door modules with frame-to-frame inline connections
Configure for seismic compliance when needed	Post options: Inline, 90-degree, 120-degree, 135-degree, three-way, four-way, adjustable, and drywall
Select gaskets to support infection prevention and control environments	
Customize ceiling and base trim shape and color	
PANEL FINISH OPTIONS	DIRT T SYSTEM INTEGRATIONS
ChromacoatPlus (paint)	DIRT T Glass Walls
Chromacoat (paint)	DIRT T Electrical
Thermofoil (3D Laminate)	DIRT T Casework
Wood Veneer	DIRT T Networks
Backpainted glass	Third-party provided hardware and technology
Magnetic marker board	
CleanWrite™ (writable film)	
Fabric	DOOR TYPES
Custom finishes	Swing Door
	Sliding Door
	Pivot Door
	DOOR OPTIONS
	Frameless Glass
	Aluminum-framed Glass
	Solid Core Wood

